

SK12-65S 12V - 65AH (C/10)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



Battery construction

Component	Positive plate	Negative plate	Container	Cover	Safety Valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid

General features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

Dimensions and weight

Length (mm / inch)258 / 10,2
 Width (mm / inch)166 / 6,54
 Height (mm / inch).....206 / 8,11
 Total Height (mm / inch).....216 / 8,46
 Approx Weight (Kg / lbs).....21,7 / 47,80

Terminal Type : F11 (M6)

Performance characteristics

NOMINAL VOLTAGE..... 12V
NUMBER OF CELL 6
NOMINAL CAPACITY (25°C)
 20 hour rate (3.40A - 10.8V) 68.0Ah
 10 hour rate (6.50A - 10.8V) 65.0Ah
 5 hour rate (11.30A - 10.5V) 56.5Ah
 1 hour rate (44.20A - 9.6V)..... 44.2Ah
INTERNAL RESISTANCE
 Fully Charged battery (25°C) 6.0 mOhms

SELF-DISCHARGE
 3% of capacity declined per month at 20°C (average)
OPERATING TEMPERATURE RANGE
 Discharge -20 — 60°C
 Charge -10 — 60°C
 Storage -20 — 60°C

MAX DISCHARGE CURRENT
 77°F (25°C)..... 650A (5s)
CHARGE METHODS Constant Voltage Charge 77°C (25°C)
Cycle use 14,4 — 14,7V
 Maximum charging current..... 19,5A
 Temperature compensation..... -30mV/°C
Standby use 13,5 — 13,8V
 Temperature compensation..... -20mV/°C

INTERNATIONAL STANDARD REFERENCES

- EN 60896-21
- EN 60896-22
- BS 6290-4
- EN 50272-2
- EUROBAT 10-12 years
 "High Performance"


CERTIFIED

- ISO 9001
- ISO 14001
- UL Component

CASE BOX

Available in
 Flame Retardant
 UL94 V0 version

Battery and terminal dimensions

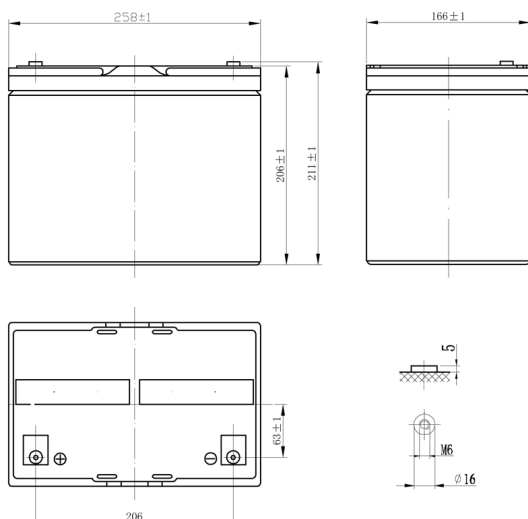

Discharge constant current (Ampere at 77°F 25°C)

TIME	5 min	10 min	15 min	20 min	30 min	45 min	60 min	2 h	3 h	5 h	10 h	20 h
1.60 V	215	160	125	97,8	70,5	53,0	44,2	24,3	17,7	12,1	7,01	3,48
1.65 V	203	151	116	92,2	68,0	52,8	41,9	23,3	17,1	11,7	6,90	3,46
1.70 V	191	143	114	90,2	66,3	50,1	41,5	23,1	16,9	11,5	6,76	3,44
1.75 V	178	132	108	87,1	66,2	49,8	40,9	22,8	16,7	11,3	6,61	3,42
1.80 V	165	120	100	80,9	61,8	47,3	38,3	21,8	16,3	11,1	6,50	3,40

Discharge constant power (Watts/cell at 77°F 25°C)

TIME	5 min	10 min	15 min	20 min	30 min	45 min	60 min	2 h	3 h	5 h	10 h	20 h
1.60 V	381	282	222	177	132	98,0	80,8	46,1	34,5	22,8	13,1	5,98
1.65 V	359	267	206	166	127	96,5	79,0	45,1	33,8	22,6	12,9	5,90
1.70 V	337	252	197	158	118	94,5	77,2	44,6	33,7	22,4	12,8	5,88
1.75 V	315	237	193	155	116	92,4	75,4	43,2	32,4	22,0	12,7	5,84
1.80 V	294	220	183	149	114	91,2	75,0	42,5	31,7	21,7	12,6	5,78